

Ground

Note: to run from (2) 20amp circuits, jumper L2 to L3 as shown.

DRAINFIELD

Timer On Float
Wide Angle w/
min 4" Tether

RECIRCULATION

Timer On Float
Wide Angle w/
min 4" Tether

High Level Alarm Float

Set Recirc Timer-ON Float @ 24"
(~500 gallon level)


Set Drainfield Timer-ON Float @ 28"
(~600 gallon level)

Wide Angle Floats with a Min 4" Tether
are Required on Timer Float Switch.

Dotted Lines Indicate
Field Connections

Service Connection:
(2) 120v 20amp for Pumps

Note: panel may be used with only (2) 20amp
circuits (L1 & L2) by jumping L2 to L3 which shares
Line L2 to the L3 10amp control circuit.

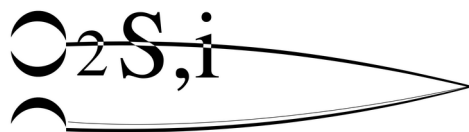

Obsidian Onsite Services, inc.

PO Box 100, Tappahannock, VA 22560
804-925-1484 obsidianonsite@verizon.net

Custom Control Panel
Model DP-TD-120v